

## **Hivulik Kinauyam namajutiha Kinauyam-lu munagijutihata Maliktha naunaiktuniagait**

National Energy Katimayit-kut (Board NEB-lunin) titirgahimayaat Ukiuqtaqtum tariunggani ikutani nautiugutaa (ArcticReview) unipqangga maqpigaq December-mi 2011 katimaqatigilgaahugit taquvlugit-lu ukiuktatumiut. Tafafumingga-lu munahiyuqtut, havaqaqtut-lu tahapqunigga-lu nanminiqaqtut taffumingga nautiuqtitlugit ihivgiuqtillugit NEB-kut tuhaayut naunaikpaqtuq kKinauyam mankijutihanik qanuqtun anggigutihanik havaqtunun tamainnun havaqtunun ataanni Canada Oil and Gas Operation Act (COGOA)<sup>1</sup> Katimayit tuhayumayut qanuq inmanggun ihumagimagajung hivuliquq maqpigaqun Kinauyam namajutihagun. Kinauyam-lu munagijutihagun malikthait (guidelines) Inungnin tamainnun 31 October 2013-mun aglaan.

### **1. *Hivunia Maliktham***

Malikthahat naunaiktuniagait iliktugiyahanik naunaiktuiniaqtuq havagumayut angginiagutuhanun tuhiktumunataanni iuiguanni 5(1)(b) COGOA-kut (tuhiktuq) pipkaiyuahuq NEB-kunun naunaihilunni Kinauyautait Namayuminaqtut ihumagivlugu aqtilaha havautihaa huli namayuminamagan Kinauyaha havaahamun atuglugit iuigua 27 (1) COGOA-kut tahapqua pitquhiit titirgaqtauhimayut hamma:

- **Kinauyamik namayuminaningga:** tughiutilik namayuminaqtumik kinauyaqamanggan tuhigami havautihamingnun namayuminaqtumik havaligumik qayangnaitumik huli hunamun tamanun qayangnaitumik nayuqtanni. Havautihamun tughiktuq naunaihimayuhauyuq akitutilahanik havaligumi. Naunaiglunilu akilihittaagiaminik tamainnun. Huli
- **Kinauyaqaniqun munahijuthaq:** Piyuminaglunni taimaa tuhiutilik havaahamun kinauyait namayuminaglutik havautihaminun tamaita piyuminaglugit havaahat qanuq ayuhautiqaqqata quviyuqaqqan halummautihanik hannahimalunni.<sup>2</sup> pivlgit hapkua muliktauyuhat pijutihat. Anggiyumik pitqukikpata ayunahitiniaqtuq hunanunlu ayunahitiniaqtut anggiyalungmikhuli tahamna ukagiyaungman Iuguanni 3. tuhiktuq havautihamigun hagvihiyuahuq nallautautihanik qanuqtun akitutiginiamangan quvihuigutihannik nutqautihanik huli halummaqtigutihagun nayuqtanun halummautihanun huli utiktigutihaa niryutinun huiktunun Inungnun ayuhaliktunun . akilihiyuminaglunniliu hunnanun akilighananun.


<sup>1</sup> Canada Oil Gassilik-lu Aulajutaata Maliguayuangga (ACT) R.S.C., 1985. cO-7. Uqauhiuyut uqunnanni ihumagivlugin maliguayualiqtahat ajiqataliuhimayut numiktitauyuminaqtut huli himautauyuhaunggittut-lu Maliguayanun numiktigutainun-lu iliyauhimayunni, kihianik mulikthahanik pijuhanun Kinauyaqautiham namajutihanik Kinauyat-lu munaqtihata pijutihat.

<sup>2</sup> Quviyuqaqan hivuniuhimayumik tamainun atayumik havaqtunun pivlugi ataanni COGOA ihumagiyauyuq tunggaviqaniaqtuq ilitugiyagiktanin piyahimayunin NEB-kutnin- maqpigaqavingmun illiyauhimayunik atrium-mi ikutaqtunik.

### ***Hivuagun qanuq illiugutat***

NEB-kunun pijutiha naunaigutihanun Kinauyaqtutihat Namayuminamanggan huli Kinauyanun munakijutiha naunaiktauniaqtuq titirgauyangga atuglu qanuq ijuhija umma ataanni. Haumianni maqpigam ijuhija pijutuhanun havaahaq havagumayuq tuhikpan taimatun qayangnaitkiyauniaman ayunahitivalagunaituq-lu taima piqatanggitanganni, ilaginiamauq havautihaa taimatun-lu ihuatkiyauniaqtuq anggalajutihanun havautihata mihaanun, huli qayanggaiqtaulutik nayuqtanun qapianaitumik. Naunaqtumun-lu upalunggaihimajutihaq kirlaminaqtumik-lu pijutihaqaglutik qayangnaqtumun hivunirhanik quyaginnaq tamanun, iqayutauyunun havaqtunni. Nayuqtanun qayangnaiqutihanik. Tuhiktuq taimatun naunaihiyuahuq Kinauyait namayuminaqtumik havautaata inikniagutanun.

Qayangnaitumik atuglugit taimaita pitquhiliuqtat alat-lu qayangnaiqutit-lu tuhiutanun iliyauhimayut. Talikpianni maqpigam pijutihaqatuq havautihamun qanuqtun pijutahat halumautiham mihanun qagaqtuqaqan.uhuyuam quvihuigianggani. Tahapqua illiyaglugin . quvilaiglugu uhuyuaq . halumaqtiglugu huli qagaqtitipata. Hunat nugupqaqtaupata himmauhilalugit quviyyikpata. Tuqhikhimayuq kinauyaqaglutik-lu panatihamik kinauyaqaglunni qaqqulilaq atuguminaqtumik ihuaqtumik qayangnaitumik havaglunni kirlamik piyuminaqtumik hunanik tamainnik panatiqaglunni anggiyugaluumik halumaiyuminaglunni quviyuqaqan.

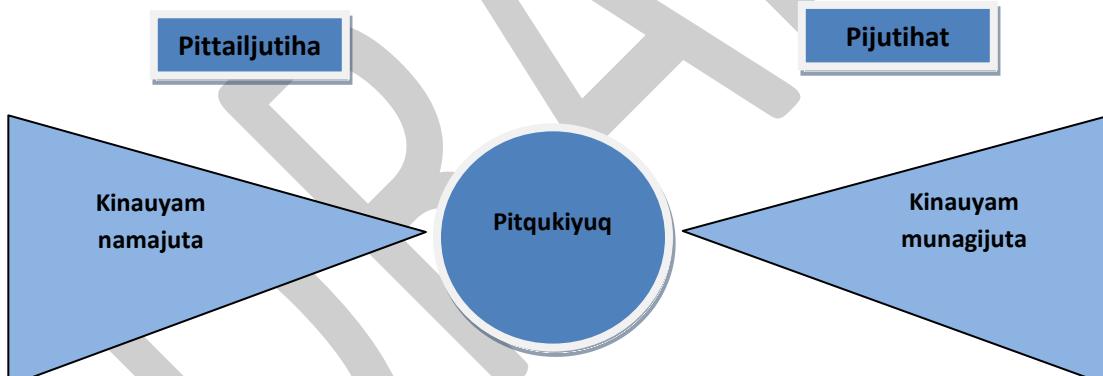

Havaqtitiryutkirnihiiayut uhuyuamik Oil and Gas kirnihiiayut qaluyut-lu havaqtut allat-lu havaqtut anggiktauhimayut anggikhimayanni COGOA-kunin pitqukittaqtut munagiayuyut COGOA-kutnin tamaitaqtut piyaqtaulutiklunin ahiguilutiklunin taimaa pigumik quvipkaitaaqtut uhuyuamik maliguanggata ataanni Kanatam-mi. COGOA Inuvialuit-lu Nunanaqttagutagun (IFA) Inuvialuit-lu Nunagiyanni Nunaqatiginni.<sup>3</sup> piyuminaqtut havaqtumun anggiktauhimayunun atuhugu iugua 5(1)(b) COGOA (havaqtitiyuq) piyugiyaulunni piyauttaqtuq

<sup>3</sup> Uigua 13 Inuvialuit Nannaqttagutaani (IFA) huli pivihqaqatuq Kinauyam munakijutihqaqatuq atuqtauyuhat maliklugu Nunanaqttagutaq Inuvialuit Inuvialuit nayuqtanni.

havangniqun.taimatunpigummi pivihibitinaqtuq havaqtitiyuq ayuhaniaqtuq naipiktunggituq. Pijutagun COGOA. Anggiyumik kigluquanilugupiniagaat taimaa naunaigihimayuq naunaiktaq atuglugu naniyauqpan quvipkaiyumik Oil and Gas maliguanggit atugugit quvinirmun<sup>4</sup> nagalunin Arctic Waters pollution Prevention Regulations<sup>5</sup> Kanatam Ukiuktaqtuanni tarriungganni.<sup>6</sup>

Anggiktautinnagu havagutihanik kirnihajutihanun Nunammi tariummilunin havaliktinnagu, havautihamik tuhiktuq naunahiyuhauyuq kinauyaqanilunni Katimayinun kinauyaqaniqun havaahamigun piyuminaglunni havaqtaham havangniganni. Katimayit ihumamiqun pittaaqtut naunaigutagun Kinauyaqanim anggitkiyanik tuqhiktum illiyahagiya. Aqtilaqanggituq atuqtahaq kinauyam munaqtihaa qaqlugu Katimayit piyumaniaqtaq.

Uiguanni 27(1.1) COGOA-mi pihimayuhauyuq anggiktauyuhauyuq ataanni pakilvianni 5(1)(b) hannahimayuhauyuq kinauyanik munayuminaqtumik pitquhihaa aulayunaituq havautaata innikniagutanun talvanni Katimayit piyumaniaqtut hannahimajutihanik kinauyum. Taima pinggitpan Katimayit havaqtuhat nuqaqtihimataaqtat ahaaglugulunin havautihanin havaqtityuq kinauyamik munahijutaitpan.

Pitqukiyuqaqpan quvipqaigumik Katimayit ihumaniaqtut halummainiaqtut tapqua havaqtitiryut halumagutipata. Huli akiliktuglugit tamaita akiliuhiaqtuhat niryutaigutipata ihuaqtumik. Katimayit pittaaqtat havauta quviyum akililugit-lu akiliuhiaqtuhat havaqtitiryuq taimatun pinggitpan huggingitpaung quvhimayuq pinggitpagit.

Kigluquatunun pijutihat titirgahimayut ataanni COGOA taimatun titirgahugit malguq pijutihaliuhimayut tahapqua-lu akiliuhiaqumayut hunnaigutikpata ahigutikpata-lunin havaqtunin pitqukipata taimatun. Hivilikmik Katimayit tutquhimataaqtut kinauyamik havaqtitiyumin ahiin akiliktahat talvangga akililugit tutquhimayumin akiliuhiaqtinnagit akiliahat. Huli ihumagiyauniaqtut ahiagun akiahqapan tutquhiffaglutik. Akiliahat tamaita avatagun pijutihiqatuhauuyut tamatkiglugit akilihaq akiliahat tamatkiglugit quviyikpata. Kitimayit akilihitaaqtut inmiqun tagaaglugit utaqkihimaitumik Uqaqtitaanirmun qanuqtun pijutihanun pimmaglumagan-lunin. Tuglianni. Akiligahaqaqpan piyahimayut Katimayi-nun. Kinauyanik pipkaitaaqtut Uqaqtitaniqu munagiyaungman Kanata-min ataanni 26(3). Anggiyumik pattaqtuq kigluquaqtumin pimmagluqtuq naunaiqpan

NEB-kut munahiyiluaqtuq nayuqtaannik naunaihitaaqtuq kirnamikliqaa munahiyuhamik havaqtunun ihuaqtumik pinggitpata. Ihuaqtumik quvipkaiyunun halumaqtigitquvlugit havaqtitiryuq pinggitpan quvipkaiyunun. NEB-kut ilihaujiyagiktut kirlamiunaqtumun

<sup>4</sup> Oil and Gas quvijutanni piyugiyayumun Maliguanggit SOR/87-331

<sup>5</sup> Arctic Waters pollution prevention Act R.S.C., 1985, c.A-12

<sup>6</sup> Atuhugu titirgahimayuq 26(1) () (a) a huli 26(2) COGOA-kut.

kirlaminaqtummihanun halumayuhanun ayuihayuahimayumik naunaiyajahittaaqtumik qanuq pijutahat namangmagan halumaqtigutihaa halummautihamun. Taimatun piyahaqaqqan. Aahaglugit-lu quvinium halumaqtigutanun.

## ***2. Hivitutilaaha tuniyahanun kinauyat namajutihanun huli kinauyat munagijutihata tuhajutihaq***

Tuhiktuq titrgaqavingmun iliniagaitkinauyanik namangmagan naunaiktutinik kinauyanun-lu munagijutihata tuhaajutihait atautiqun tunijutagun maqpigam tuhiutimigun anggigutihamun. Tuhiktuq uniujauniaqtuq NEB-kut tuhapqaqlugit apihinnani katimaqtiglugin naunaiktugiangga qaqlugu tuhiniamanggami tahapqua kinauyat namayuminamanggata kinauyat-lu munaqutihaita tuhajutihanun anggiktautinnagit tuhiktuq.

Ilauniaman anggigutihaanun tuhiutagun. Havautihamun tuhiktuq tunihiyuhauluyuq malgungnik alatkingnik aqiqutilahangnik: (1) akitutilahaa inniniagutanun aglaan hunamun-lu nayuqtanni qayangnaitumik havaliqata. Huli (2) akitutilahanik tamaanun halummaqtigutiham quvipkaipata hivuniugutanik anggiyugaalungmun namayumik. Huli avvataagun-lu. Tuhiktuq naunaiktuiniaqtuq-lu unipkaglunni qanuqtun pijutihamik tamaingnun qanuqtun hupkua akitutilahait naunaiqtaungmagata hulinamajutiha iqaytaulunni-lu tuniyainnun maqpiganun tuhiagutainnun naunaiktutiglugin akilguminanilunni akiliahanun.

Mikinihaqun. Tuhiktuq tuhianiatuq Nuna-mi havautihaminik tuhikglunni Katimayinun tatkhiutik malguq titirtinnagik ahiin tarriummun tuhiuta 6-sit tatkhiutit natinnagit ihumaliugutihat tikitinngu Katimayit. Kihimi hapinaqtumik apihikpan hivitutkiyanik pivihqaqtuhauyut tuhiktmun. Hivuliqun maqpigaqqun kinauyaqtutihat pijutihanun piyayuhauyuq. Kinggulik pijutihaq tuniyauniaqtuq Katimayinun piyagiqajung Kitimayit ihivgiugikqajung anggiglugit. Haviktautinnagu.

## ***3. Piyayuhat akitutilangata ilitugijutihait***

Naunaiktuqtauniaqpan aqtilingga kinauyam namajutiha kinauyam-lu munagijutiha pihimayuhauyuq. Katimayit pihimayahagiyait tahapquningga qayangnaitumik havaquvlugit quviyitqunagat (kinauyaqaglutik namayuminaqtumik pitqukipata) huli kirlaminaqtumik quvipkaiyunun. Taimatun pikpata (kinauyahat munagijutihanun) akitutilahait uquningga pihimayuhauyut ilittugiyahatigun hapqunningga pihimayuhauyut:

### **A. Pijutihannik Kinauyakaglunni namayuminnaqtumik:**

Tuhiktuq havautihamun ilittugipkainiaqtuq akitutilahanik atuqtauyuhamik havalikqata . illiyauhimalutik-lu tamaita akiliktahat havalikqata ihuaqtumik havaqtuhat havagiangginni qayangnaitumik havagiangginni huli nayuqtannun halummagutiqunagat ihuaqtumik havaquvlugit . pilluahimalugit. Tuhiktuq nigiuguyauniaqtuq naunaiktuilunni akitutilahannik

havaligummik ilagilugit anggalajutait ilagilugu-lu ihuaqtumik havautainnik atanniktutagun pitquhia.

### **B. Ijutihannik Kinauyam munakijutihanun:**

Tuhiktuq tunihiniaqtuq Katimayinun qanuqtun akitutiginiamangan havangnik atuqtauliqan quviyuqaqpaa hivuniugikta anggiyugaalumik quviyikpata. Tuhiutit hapqunningga illihimayuhauuyut qanuqtun naunajutihannik huli apihuiyuhauuyut naunaiktugiangganni huuq taimatun pingmagata hunnahivunigivlugu anggiyumik quvipkaipata.

Naunaiktugumikik akitutilahait hiyuqaqan havautihaat atuqtauliqan quviyuqaqan hivuniuhimayumik anggiyugalungmik quvipkaipata hapqunningga illihimayuhauyuq:

- a) Ilihimalugu pitqukijuta
- b) Halummatigutiha nayuqtaata
- c) Akiliktitihat ayuhaliktunun Inuniaktunun tahammanni

#### ***a) Ikitutilahaa quvihuiniagutihaa piqkiyunni***

Nutqaqtitaunik piyauhimayuq quvihuigutanik taiyauvaqtuq uhuyuam nayuqtanun. Huli quvivalayuq-lu halumaigutiyuq-lu. Tuhiqtuq tunihiyuhauuyut ilitugijutihannik naunaiktuglugit akitutilanggit quvihuikitillugu pitqukiyunin naunaiktuglugit akitutilahai taimatun tuhiutihat piyauhimaqpata qanuq illiugutai qaffiuyut atuqtauniaqtut taimaitumik tahapqua atuqtauniaqtut ihugutigilugit ihumaliugutiginiagait ihuahaglugit atuniagait ihumaliugutihaagunpitquhihaagun, aqtilingga, aqtilahaa havaqviham . taquyuminahinahuaglugu piyahauyuq. Tuhiktuq tamaita ihumagiyahagiyait pijutauvaqtut anggiyumik quviyuqaqtumun. Akitutilanggalu:

- Qanuq ijuhia, aqtilingga, qaqqut, humitilahaa havaviham pijutihaa;
- Nutqaqtijutiha quvijuta uhuyuam;
- Atuqtauluaqtuhat hivuniuqtat qanuq-lu pijutihait quviyumin halumailgumun-lu pijutihaq, munahiyuhanik-lu . qanuq illivaliajuta. Halummaqtinik-lu irmaqmi. Qangganilu. Hinaan-lu hiqu. Hiqu-munlu hikqutihimayumun. Piyuminaqpaa;
- Qanuq quvijutaata aqtilingga. Anggitilingga piutait-lu qanuq illijutaulimaituq quvigumi aqtilanggata anggiyugaalungmun quvigummi;
- Amigaitilahait iqayutihat hunavaluit, hapqua-lu ummiaqpait hiququtit-lu;
- Hunaliqa tamaita hungiutitaqtut havaviham-mi, qanuq-lu qayangnaqtut anggalatjutihait;

- Nayuqtangganni, atugahat-lu hummi illuaninggata qanuq illijutihait uhiyunun-lu inniamagan, nuqautaquviyum halummauta-lu quvihimayummi quviyumin.

**b) Akitutilahaa halummaqtigutaata nayuqtaanni**

Tuhiktuqtuni iyuhauyuq Katimayinun akitutilahanik nayuqtaata halummaqtigutihagun anggiyugaalumik quviyikpata hivuniugutihannik-lu qanuqtun tahapkua akitutilahait pingmagatigik. Tuhiktum ihumagiyahagiay tamaita hulijutihat qanuq illijutauniamata akitutilanganun nayuqtanun halummahigumik.titirgaglugit ihagutilikhuli ihuahaglugit nayuqtanun piyuhauyut. Huanggatalingga. Aqtilatera-lu havaqtaham mihagun naunainahuaglugu-lu hunamik kihingguhimaитumik.

- Quviyuq quvimapum itjuhia (tahapqua quvimapum alatkivaluit-lu piutait aqtilanginik quvimapum. Uhuyuanni American Petroleum Institute (API) itjuhia. Quvimapumtaata. Uhuyuanggutilingga tahaffumanituq. Alanik-lu avuqaqtolangga.);
- Nayuqtaata aqtilangga qanuq illiyumun (ujiqutigiluguNunam-mi Tarriummi-lunin. Imam ititillanga. Qanggani ataanni-lunin quvikpan halumaigutiyuq-lu hiquqaqtolangga-lu. Hagvaq. Maliit. Ukium huqpahiktilingga. Kirqautilangga. Daanik-lu);
- Pittaqtumik huli ihuaqtumik hivuniuqtahat quviyyut mahaannun havalikqataqaqugugaikpan (huli qanggiglulunin taffumanni ukiummi quviyumik halumaikpata halumaikin-lu qanggigaluaqtillugu havaguigaluaqtilegit);
- Nayuqtannik munahiyuqtut quyalitauniamagan ihumagilugu pijutihat;
- Piyahaqaglunni-lu atuqtahanik piqaglutik-lu, ayuihahimayunik-lu havaqtihaqaglutik, ihuaqtunik-lu havautihaqaglutik;
- Quviyumun munaqtiqaglutik atuqtauvaqtunik ihuaqtumik havagiangginni halummaqtigiligumik;
- Ilittuhuglugit initugiuvavat. Atuqtauvaqtut . Inuniavigivagait-lu. Havaqtut-lu. Alat-lu atuqtauluaqpatut tahammanni.

**c) Akitutilahaa akiliktahanun**

Tuhiaqtuq havautihamigun tuniniagait Katimayit naunaihimayumik akitutilahanik Inungnun akiliktahanun anggiyugaalungmik quviyigumik huli kigluquagutaat ihumagiyahauyuq qanuqtun tahapkua akitutilangit naunaimagagit. Akitutilahaa piyauqpan ihumagiyahagiay tamaita hulijutayut huuq tamaita akiliktahanik Inuit tamaita ihumagilugit piyaquqtunin.Katimayit ihumayut tuhahimayu havauthaminik ihuigutinniagait Inuit ayuhalikata naunaiktuiqumi taimangganin ilihimayait pinggitqumig. Tahapqua atannuniliyahimayut ihagutivihanun

ihuahahimayut taffuma muhaanun. Huanggatilangga, aqtillanga-lu havaviuyuham. Taquqtauyuminaglunni pijutaitumik.

- Anggiktauhimayut Unggahitilangit Innilaanin havaqtut;
- Akitutilahait himmauhiniagumikik Innilaanin Imaq nirkihanggat-lu;
- Qanuq aqtigiyumik nirkihaq atuqpangmagajung angguniahutik. Ikaluhihutik-lu pitquhimiqun Inuniagutimiqun Inuniavigivlugu-lu;
- Huigujauyut Inulgaat kinauyaliugutigivaqtgaluangat hivunirmingni-lu anggunianiqun ikaluhihutik-lu qatilgivaqtanin-lu;
- Nunam quvviananiga pitquhiktituhugu ukiuktaqtumiut Innilaanitut-lu;
- Malikthat-lu Nunanaqtagutit atuhugit munagiayuyut-lu ataanni Nunanaqtaagutit.

#### ***4. Tahapqua alanggutitauqpataillittugijutihat tunikpatigik***

Havaqtut ihumagiyauniaqtut tunihitquvlugit tuhapkailutik alangguqtumikpiyahat alangguqpatapijutihagun kinauyat namajutinggat nagalunin kinauyanun munakijutihanun, akitutilahait naunaiktuglugit havavihaanun, naunaiktuglugu-lu qayangnaninga naunaiktugumiqu, quviyumin upalugaihimayuhaq hivuniha. Nagalunin akitutilahaa anggiyumik quviyigumik. Tahapqua alangguqpata qanuq pijutihait alangguniamata havaqtitiryum ilittugipqaqtahagiyait Katimayit titirgaaglutik kirlamik alangguqpan.

#### ***5. Ilittugiyagihiyutihat anggiyugaalungmik quviyigumik akilitutihaita naunaiktutait***

Kinauyanik havaqtum tuhihirmayumin atiliuhimayuhaq anggiyugaalungmik quvipkaigumik akitutilahanniknaunaiktujagihilugit-lu ihuamanggata ilitugiyahat tuniyauyt Katimayinun maliglugit hapqua atuqtahat. Kinauyanik havaqtuq havaaqaniaqtuq kinauyanu Inungnik-lu havaqtunikhuli hapinaqtutaulajutinik-lu havaqtunun namagiyaniqk pitquhiagun ilanggitigun amigaittunni atanniuluaqtuq taimatun pihungguyuq anggigun alangguqpan.

#### ***6. Illitugipkailuni Kinauyat Namajutihaannik huli Kinauyat Munaqutihannik***

Illauniaman tuhiutaata mihaagun. Tuhiktuq illitugipkaiyuhauluyuq Kinauyat Namajutihaagun ihumagivlugu atuqtauyuhaq havalikqata taimatun-lu pijutihaqaniaqtuq Kinauyam Munakijutihaagun pijutauttaaqtumik Anggiyugaalungmik.

***Illitugipkailunni atuqtauyuyuminaqtumik Kinauyamik Namayuminaqtumik:*** Illitugipkailunni tuhiutilik akilihiyuminaglunni akilighanikpan qayangnaitumik havaqtitiryuminaglутik irniguminaglugu-lu hivunihaata unipqaglugu akihaa havaligumik akiliguminamangan havaviata irnikniagutaagun. Tahamna illitugipqaniagaa tuhiktuq havautihamigun aqayutigilugu tuqhiutinni havautihamigun

ihuahahimayunniq Kinauyannik. (audited financial statements) huli Kinauyaliuviiit (B-nautiugutaitigun<sup>7</sup>) tuhiktuq qanuq aqtilaanganik Kinauyanik atuguminamagammi titirgahimayunin huli tuhiaqtum havavitik havaqtitiryut ihumagiyauniaqtuq namalimainnulugit Katimayit ihumaliugutiqaniatut qanuq ijuhiinik Kinauyat Namajutiha innik. Ilauluni-lu taimatun naunainiaqtuq namayuminaqtumik Kinauyat huanggatauniaqtut pijutiqaglunni-lu.

**Illittugipkailuni namayuhamik Kinauyat Munagijutihaaqun:** tuhiktuq illtugipkaiyuhanayuq piyuminaglunni akiliktuuyuminaglunni tamainun akiligahagun anggiyumiq quvipkaikpata.

Katimayit hunamik piqutaittumik piyuminaglutik Kinauyanin piyuminaglutik illittugijutihatigun Kinauyat Munagijutihatigun titirkiahimalutik atukiutihamiqun. Katimayit pihimayahagiyaat hunamik piqutaittumik illanga Kinauyam piyuminaglugu aqtilangganik anggitkiyanik-lunin Havautihaata akitutilaahata naunaitutagun uhuyuam quvihuiniagutaagun piyaqqupata kihimi Katimayit hivuniqanggittuq quviyumin kihian atunialilugu kihimi Katimayit atuqtaaqtat Kinauyaq hunnamunliqa atuglugu pitqukiyt pivlugit. Pimmagluqpata Akiliutihamun-lu illagilugu Inungnun akiliahanun hunna utiktitahauqpan.

- i. **Ipihimaitut Kinauyat:** Kinauyaqaniqun pinatihat ipiktauhimaitunik pivihaqaglutik piyuminaglutik Katimayit kirlamiinaqtumik piyuminaglutik Kinauyanun. Taimatun piyahagugumik. Tahamma piyahautquvlugu piyaquqtunun taimaa havaqtitiryuq akilihingitpan inmiqun akilitahanun. Ipihimaitumik Kinauyanik utiktitaulimaitunik titirgaqaglunni. Naunaiktuulutik quyalijuhaq Her Majesty The Queen piyuminaglunni Kanatamin Kanatammi bank-nin. Calgary titirgavianin. Tiliyaqaglutik National Energy Katimayinin” titirgaqatuguminaqtuhauyuq havaqtut taimaniagutanun hulitauq allamik piyuhanayut taimaa pitquyaugumik Katimayinin. Titirkiahimalutik atukiutihamiqun piyumayaqpan Katimayinin taimaitun piyuqaqpata. Kitutliqa titirgahimalunni imatun pihimayuhauyuq. Piyuhihirmaitunik utiktitaulimaitunik-lunin. Hivuniuhimayunun taimatun Kinauyaqavihat tahapqua ihuahaquvlugit piyaqquqtunin.

Huli alauyuanun ipikhimaitunun Kinauyanun. Katimayit piyuhanayut tuhiktum qayangnaiqutihainnik akilihimalutik.

- ii. **Qapianaitqutit:** Katimayit pihimayuhauyuq havaqtitiryuq pihimalunni. Mikinihaulugu quviyummun hallumainaqtumun-lu qapianaitkutihanik (insurance). Hivuniqaqtumik anggiyumiq illitugijutihat pihimayuhauyuq atuglugu Appendix 1 hulitauq titirgahimalutik Katimayinun atiliuhimalugu tuhiktumin Kinauyalikiyianin havaqtianin hapqunningga:
  - Atia qapianaitqutinik piqaqtum
  - Aqtilingga qapianaitqutim aqtilingga

<sup>7</sup> Taimatu pijutihat imatun inniaqtut “BBB” anggikiyaniluni atutauvaqtumin huli pipkaivaqtunun “BBB mikinihaulunni” anggikiyanniklunin DBRS: Baa3” anggikiyaulunni Mood:s-min “BBB” anggikiyaulunni Fitch:-min /ajiqtaulunni alatkinin Nunayuanni atuqtauvaqtunni taimatun nautiuyuqtunin.

- Qaqugunguqan akiliutihat akilihihnahikpan akilihitinnagit
- Tamna tuhiaqtuq akihaqglunni akiliahanun pijutihait atuglugit
- Hivitutilaaha qapianaitqutihat illiyauhimayut hanaihugit
- Katimayit-kut illittugipqatauniaqtut 60-it natinnagit nutqaqtiniagumiqu qapianaiqut
- Titirgaglugit taimaqtitauhimayut
- Qapianaiqutihanik tuniyauhimayut atukiutihaaqun naunaihimalunni kinauyaliugutimigun (B-anqtilahaa<sup>8</sup>) qulaanittuttlunin
- Tamamik pijutihaaqat atiqaqtuhauyut Katimayinun qapianaiqutihaaqatut

Tuhutiqatuq qapianaitqutihanik pijutihaaqpan atuktahanik. Qapianaitqutit. Huli ilauniamata qulaanitutun ihivgiuhimalunni tamainun qapianaitqutihatigun tuniyiyuhauyut inmiqun havqtumik. Ahiin tamna inmiqatuq tamatun ilumunilugu tahapquningga. Tahapqua illittugiyahat naniyauttaaqtut Appendix 11.

Tuhiaqtuq piyumayuq inmigun havagumayuq pinggahuanni atuhimaitumik qapianaitqunmun. Kinauyalikiyat havaqtuq taimatun ilumunilugu namanilutik piqanilutik akiliguminaglugu anggigaluapan quviyuq.

- iii. **Qapianaitqutit:** Ikiliktahaq tamatkinggitpan taffumangga Kinauyumin anggiyugaaluq quvikpan tamatkiglugu pilimaitpajung iptiutaitumin qapianaiqunmin-lu akiliktauniaqtuq. Ahiin tuhiktum akiliktahat akilirniagaa.
- **Alat Kinauyahat piyauyuminaqtut:** amiaqua akiliktaham angguyugalungmun akituyuq piyaunggitpata piyauyumin titirgamin pipqaqtauniatut hapqua atuglugit atauhimin malgungnin-lunin uqumaliglugit.
  - **Ilaffaqtuhat pinggayunin-pipkaiyunin qapianaitqutit:** anggitkiyagun qapianaitqutaata pijutihait naunaiktauyagihimayut iuguanni 7(ii). Taimatun piyauyuminaqtut. Tuhutiqatuq kaittiniagait Katimayit illitugiyahannik titirgahimayut iuguanni 7(ii).
  - **Ihivgiuhimayut Kinauyaqtutit maqpiganggit:** illituigapkaitaaqtunik tamna tuhiutiqatuq havaahammun namayunik Kinauyaqtuq huanggayunik amigaittunik-lu Kinauyaqanilugu.huminlunin piyuminaqtilangga Kinauyanik akilihilayumik tamaanun anggiyugaalungmik quviyikpata. Havaviitta ihumagiyaunggitaanganni Ihivgiuhimayunik maqpigaanik taffumangga tuhiaqtumin (kihianni maqpigaaq sainnihimaqpaung uqahimalunni akilihiyuminaqtut).

<sup>8</sup> Taimatu pijutihat imatun inniaqtut “BBB” anggikiyaniluni atutauvaqtumin huli pipkaivaqtunun “BBB mikinihaulunni” anggikiyanniklunin DBRS: Baa3” anggikiyalunni Mood:s-min “BBB” anggikiyalunni Fitch:-min /ajiqtaulunni alatkinin Nunayuanni atuqtauvaqtunni taimatun nautiuyuqtunin.

- **Titikiuhiahimalutikauqkiguminaniglutik:** titirgaq utiktitaulimailunni atukiutihaq pipqatauniatuq ipiktauhimaittumik ilangganun Kinauyaqautihat Munagiyahamun taima titirgahimaman uiguanni 7(i).titirgaq atukiutihaq pihimayuhauyuquvvangga Kanatam-mi Bank-min. Calgary titrigavianun. Naunaiktuivaqtut quyalitihaa pivlugu “her Majsty the Queen Kanatam-mi tuniyauhimayuq National Energy Katimayinu” titirgahimayuq ihagitihimayuhauyuq irniniagutanun anggiktauhimalunni hulitauq ilahannik pitquaugumik Katimayi-nin.
- **Nanminirgyaata alatlunin iqayunninga:** taimatun havaqtitiryuqtut illagiktut huli qanggit pipkaiyumaqtuq Katimayinun titirgahimayumik naunaiktuuhimalunni Katimayit nigiungniaqtut taffumangga akiliuhiatuhat Kinauyaqaqqun havaqtitiryum havaqtitiryumin akiliktuhanun anggiyugaalungmik quviyikpata. Tamna titirgaq illighimayuhauyuq titrigamaq ihuahahimayunik kinauyaqautinik illaqlunni taimatun-lu atuqkikguminaglunni havavingminin.
- **Havaqatigiktut qaffit Kinauyaat:** Tuhihirmayuq naunaiktuiniaqtuq pijutihannikillau anggiyugaalungmik qaffiuyut havaqatigiktut Kinauyat atuqtauyuhaq quviyikpata.
- Alatlunin upalunggaiktat namaqtunik Katimayit-kunun

Katimayit ihumagiyuatait atuqtauvaqtunin tutquhuhimayunik pilimaitut piyauyhannik taimatun naunaiktuilimaitat Kinauyam Munaqutihagun.

## **Appendix I-PIJUTIHAQ QAPIANAITQUTIHAMUN MAQPIGANGGA**

### **Qapianaitquhihiyuq**

- (1) Uvvagut.atilihimayugut (Insurer) (nagalunin) (Qapianaihihiyut havaqtut). Tadja ilummaqtut anggihutik-lu:
- (2) taffuma qapianaiqutaata nahauta\_\_\_\_\_ ihagutivia ahiin nunggulunni uvanni\_\_\_\_\_
- tuniyauyuq ummungga\_\_\_\_\_ (talvanggaanin taiyauniaqtuq qapianaitquhiktuq') tugaavia ummanittuq\_\_\_\_\_ tamna uqagiyaat qapianaitqutihamun pilimaittait-lu unna qappianaiqun piyahimayuq unna pivlugu
  - Anggalattuminaglugu quviyuq qayangnaitquta pitquhahit piquyat-lu tuniyauyumin aqtilaha aqtilangganik \$\_\_\_\_\_ piyaqutittamainun  
Ingaqpaliyuq halumaigutivlunni-lu (quviyumin halumaiqtumin-lu) halummaqtigutiha-lu qapianaitquta (unna-lu illunni namayuminaqtumik halumaiktauqpan akilkutithanik akiha \$\_\_\_\_\_ piyaqqutait maliglugit)
  - Nutqaqtillugu quviyuq huli quvhimayuq halumaiktaglu-lu. Halummaqtirglugu qayangnaqtuq-lu qapianaitqutagun (huli illagilugit akilkutuguminaglugit tuniyuminaglugit) atautimuglugit inmiquuqtut pitqukiyut aqtilangga akiha \$\_\_\_\_\_ pitqukijutaata [100%] naaga-lunin [qapianaiquhihirayumun qapianaitquhiktam pijutihagun]
  - Piiktautaqtuq piyaqutainin illiqun akiha \$\_\_\_\_\_ [100%]
- (3) tamna qapianaitqutihaq nutqaqtitaulyunaittuq piyuminaqtumin qapianaitqutihaq pijutiha nutqaqtitaulyunaittuq illittugijutihat titirgaaglunni tuniyaulgaaqtinnagu qapianaitquhiktamun huli tunilugit Katimayit: hulittauq. Taiqamatun nutqavihaa piyauyunaittuq nutqavihanun ublut 60-it nutqavihanun illittugijugiyutihamin tuniyauyumin qapianaitquhihirayumin:
- (4) [piguptigik atuqkivihiat huanggatalanggalunin Kinauyautaita piyuminanig] naggalunin [tamna qapianaitqutihamik pipkaiyuq titirgaqtigun qulanni tamamilat atuqkiguminaglutik piyagihimayunik Kinauyautihatigun huangganing]

- “BBB” Anggitkiyanik-lunin atuqtauvaqtuvatunin & Poor’s: “BBB nakinniha” kinggitkiyauluni-lunin DBRS:-min Baa3” kinggitkiyaulunni-lunin Moody’s:”BBB-“ kinggitkiyauluni fitch-min: huli / atjiquatalunni allamin Nunayuaninilitagiyau malunni piyuminaqtunin.
- Nutqagupta qapianaiquhiktuiyuq nutqaqniaqtuq pijutihanun. Ahiin illitugipqaniagivut pihimayut Katimayit-lu (NEB) titirgahimalunni.

Atiliuqtuq tapqua pivlugit huli qapianaitqutihamik akiliktuiyumin

## **Appendix II-PIJUTIHAQAQ TUQ NAUNAIGUTANNI MAQPIGAAGGA**

### **Pinggayuannun pihimayuq**

Uvvagut. Atiliuqtugut ataanni pinggayuanni,tadja piyugut ihivgluqtavut :

- (1) qapianaitqutim nahauta(tait)\_\_\_\_\_ ihagutivia umanga huli nuguniaqtuq uvanni\_\_\_\_\_ tuniyauhimangman uvvanganin taiyauniaqtuq qappinaitquhiktuq tugaaviqaqtuq umanni\_\_\_\_\_
- (2) Qapianaitqun uqunununga pihimayuq
- Anggalatuminaglugu qavyum qapianaitutaa aqtilanganun akiha \$\_\_\_\_\_ piyuqulayunun
  - Makimayuq Qayunagnaqtuq (quvimayuq halumailguq-lu) halummaqtigutihanun qayangnahijuta-lu qayangnaiqutaa (haoqua ilagivlugit akihaa ihuahautihamun akiliktitihanun-lu aqtilahaanun akiha \$\_\_\_\_\_ piyaquqtut maliglugit
  - Nutqaqtuminaglugu quvimayuq huli halumailguq-lu. Halummaqtigutaagun qapianaitquta (hapqunnunggaltugaahimalunni qayangnaqtumunihuahautihaagun ikiliktitihanun-lu) atautimuglugit atauhinggaqtitalugit aqtilahanun akiha\$\_\_\_\_\_ tamainun quviyunun.[100% } nagalunin [qapianaitqunmun pijutauyuq]
  - Piikttaaqtuq piyaquutilangginin akiha \$\_\_\_\_\_ [100%]
- (3) Qapianaitqutik illiyauhimayut uqahimajutihait maliglugit piyat qapianaitqutut nutqaqtitauniaqtut tuniyaulgaqtinnagit titirgahimalutik nauvihimayumun qapianaitqutinik Katimayit-lu: hulitauq. Nutqaqtijutihaa piyunaittuq 60-it ublut naatqaqtinagit ilittugitjutihanin pikpajung qapianaitqun:
- (4) [taimaa qapianaitqutihanik piviyut atauhirmik pijutihaqaglunni amigaitkiyainik-lunin atauhimik pivihaqaglunni amigaikiyainnik-lunin Kinauyaqaniqun piyuminaniganni [tamarmik titirgahimayumik atauhirmik amigaitkiyainiklunin Kinauyahanik-lunin huanggataitigun]
- “BBB” Anggitkiyanik-lunin atuqtauvaqtuvatunin & Poor’s: “BBB nakinniha” kinggitkiyauluni-lunin DBRS:-min Baa3” kinggitkiyaulunni-lunin Moody’s:”BBB-“ kinggitkiyauluni fitch-min: huli / atjiquaulunni allamin Nunayuaninilitagiyaumalunni piyuminaqtunin

Atiliuqtuq tapqua pivlugit huli qapianaitqutihanik akiliktuiyumun